

# Technical data sheet

## Type 895 Non return-valve System 05

### Applications and special features



- Operating position : horizontal and vertical
- Minimum occupation of space
- Very low head loss
- For pumping, water supply, general industry
- Closing system : double plate with return spring

### Technical description

DN "	mm	PN	PFA in bar	PS in bar				Cat.	References	Vvs-nr
				L1	L2	G1	G2			
2	50	10/16	16	16	16	16	16	I	149B 3000	
2 1/2	65	10/16	16	16	16	15	16	I	149B 3001	
3	80	10/16	16	16	16	12	16	I	149B 3002	
4	100	10/16	16	16	16	10	16	I	149B 3003	
5	125	10/16	16	16	16	0,5	16	I	149B 3004	
6	150	10/16	16	13	16	0,5	16	I	149B 3005	
8	200	10/16	16	10	16	0,5	16	I	149B 3006	
10	250	10/16	16	10	16	0,5	14	I	149B 3007	
12	300	10/16	16	10	16	0,5	11	I	149B 3008	

#### Important notice:

The indicated pressure for the different categories of fluids (L1/L2/G1/G2) is under no condition a guarantee of use. Therefore, it is essential to validate the use of products under given operating conditions.

- **Connection** : Mounting between flanges, PN see table.
- **Permissible operating pressure PFA - water-** (for supply, distribution and disposal of water) : See table
- **Maximum permissible pressure PS - other mediums** : See table

• **θ** Mini. -10 °C  
Maxi. 100 °C

• **Mediums** : Clear water, gas

• **Approvals** : ACS PED 97/23/CE

**Wras approved material** : Consult us

• **International construction Standards** :


CE Conformity Directive 97/23/CE

Flange drilling according to EN1092-2

Overall dimensions according to EN558-1 serie 50

### Overall dimensions


	A	B	C	D	Weight
"	mm	mm	mm	mm	kg
2	50	54	60	109	1,2
2 1/2	65	54	73	129	1,8
3	80	57	89	144	2,9
4	100	64	114	164	3,9
5	125	70	141	194	5,8
6	150	76	168	220	8
8	200	95	219	275	14
10	250	108	273	330	22
12	300	143	324	380	34

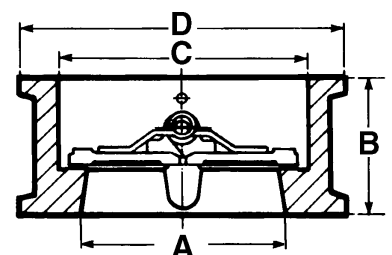

## Technical data sheet Type 895 - Non return-valve

### Spare parts list and materials

Nb	Description	Materials	EURO	ANSI
1	CASING DN50 to 150	Cast iron + epoxy	EN-GJL-250	ASTM A 48 35 B
	DN200 to 300	Ductile iron + epoxy	EN-GJS-400.15	ASTM A 536 60-40-18
2	PLATES	Stainless steel	X5CrNi18-10	AISI 304
3	SEAL	EPDM		
4	SPRING	Stainless steel	X5CrNiMo17-12-2	AISI 316
5	STEM	Stainless steel	X5CrNiMo17-12-2	AISI 316
6	BEARING	PTFE		
7	EYE BOLT DN>150	Steel XC15		
8	PLUGS	Brass		




### Working principle

DN		Opening pressure in mm/CE	Kv	ζ
"	mm		m <sup>3</sup> /H	
2	50	Near 0	39,50	6,30
2 1/2	65		82,50	4,10
3	80		137,00	3,40
4	100		250,00	2,50
5	125		513,00	1,45
6	150		891,00	1,00
8	200		1503,00	1,10
10	250		2746,00	1,10
12	300		3986,00	1,10

#### Directions for use :

- Solid line : Valve completely open
- Dotted line : opening stage of valve

ΔP

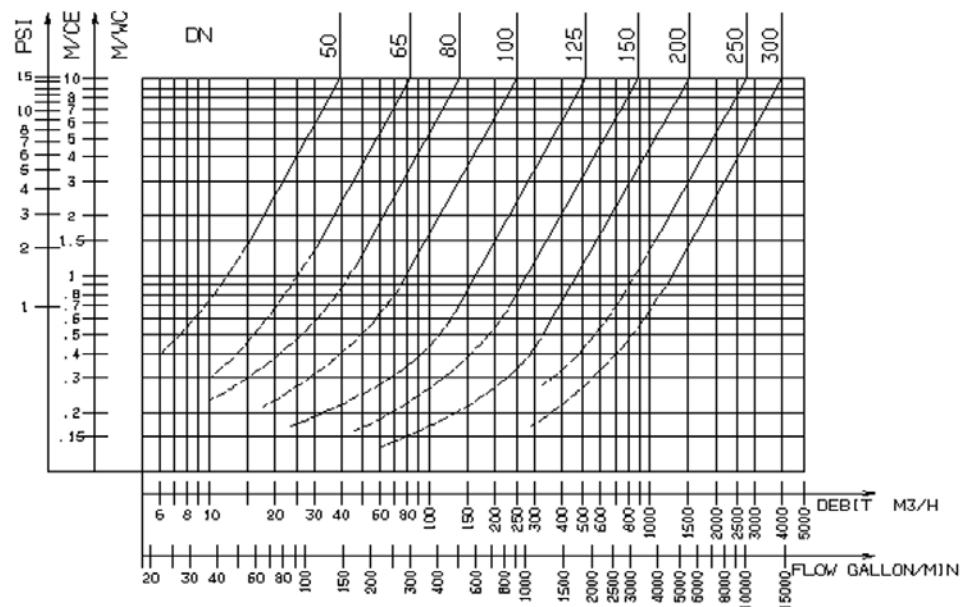

Socla can accept no responsibility for possible errors in catalogue, brochures and other printed material. Socla reserve the right to alter its products without notice. This also applies to products already agreed. All trademarks in this material are the property of the respective companies. All right reserved.

### Socla SAS

365 rue du lieutenant Putier  
71530 VIREY LE GRAND  
Postal address : BP 10273  
71107 CHALON SUR SAONE Cedex

Tel : 33 3 85 97 42 52  
Fax : 33 3 85 97 97 42  
<http://www.socla.com>  
e-mail: [commerfr@socla.com](mailto:commerfr@socla.com)